

# MSTC48B3/MSTC66B3Z

## Pre-Bent Straps

The MSTC48B3 and MSTC66B3Z are pre-bent straps designed to transfer tension load from an upper-story shearwall to a beam on the story below.

**Material:** 14 gauge


**Finish:** Galvanized. Some products available in ZMAX® coating.

**Codes:** See p. 13 for Code Reference Key Chart


These products are available with additional corrosion protection. For more information, see p. 16.

Model No.	Min. Wood Beam Dimension (in.)		Fasteners (in.)			Allowable Tension Loads		Code Ref.
			Beam		Studs/ Post			
	Width (min.)	Depth (min.)	Face	Bottom				
						DF/SP	SPF/HF	
						(160)	(160)	
MSTC48B3	3	9¼	(12) 0.148 x 3	(4) 0.148 x 3	(38) 0.148 x 3	3,975	3,900	IBC® FL, LA
MSTC66B3Z	3½	11¼	(14) 0.148 x 3			4,490	4,490	


- Using fewer than 38 nails in the studs/post will reduce the allowable load of the connection. To calculate a reduced allowable load, subtract 199 lb. per missing nail for DF/SP or 172 lb. per nail for HF/SPF.
- Nails in studs/post shall be installed symmetrically. Nails may be installed over the entire length of the strap in the studs/post.
- The minimum 3"-wide beam may be made up of two 2x members.
- MSTC48B3 and MSTC66B3Z installed over wood structural panel sheathing up to 1/2" thick achieve 0.85 of table loads.
- PSL beam may be used in lieu of a standard-dimension lumber beam with no load reductions.
- Multiply allowable loads by 1.85 to attain an allowable load for installations where two straps have been installed with a 1 1/2" clear space between straps.
- Structural composite lumber columns have sides that show either the wide face or the edges of the lumber strands/veneers known as the narrow face. Values in the tables reflect installation into the wide face. See technical bulletin T-C-SCLCLM at [strongtie.com](http://strongtie.com) for load reductions resulting from narrow-face installations.
- Fasteners:** Nail dimensions are listed diameter by length. See pp. 23–24 for fastener information.

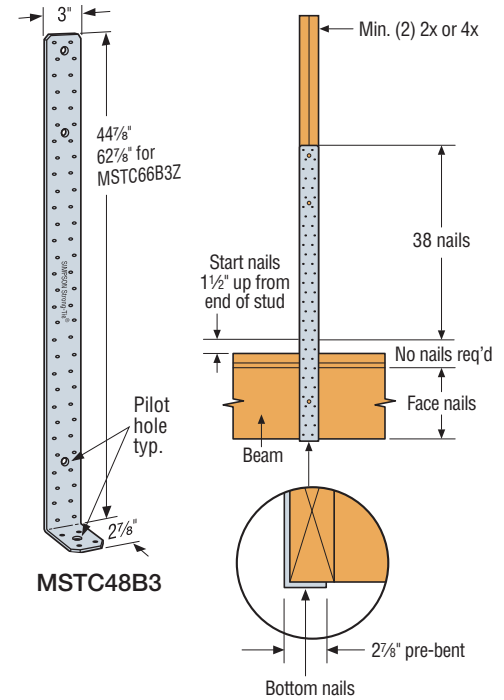


**MSTC48B3**  
Installation with No Rim Board

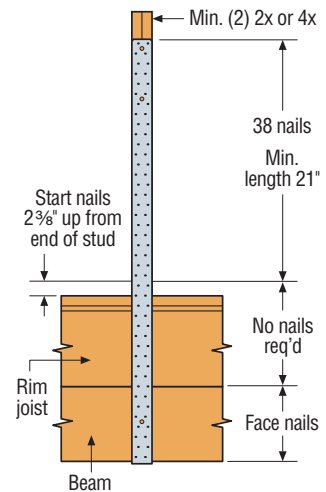

**MSTC66B3Z Installation with Rim Board**

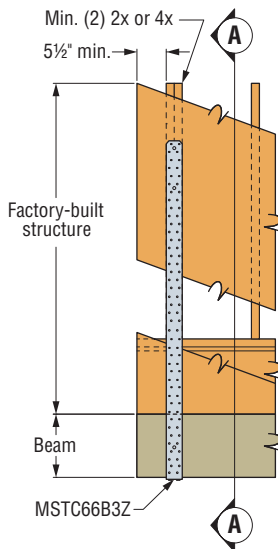

**MSTC66B3Z Installation**

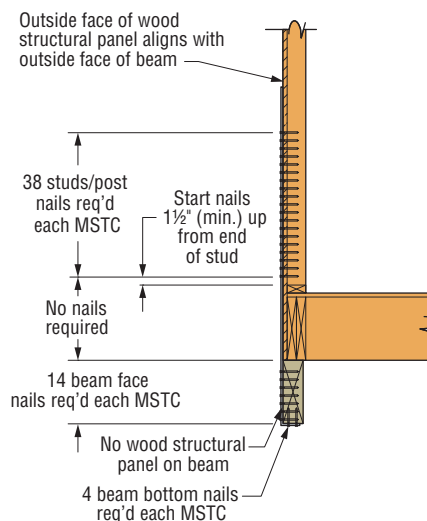

**Section A-A**